


New 2018



HYDRO INSERT 16 / 23

350 / 465 m³

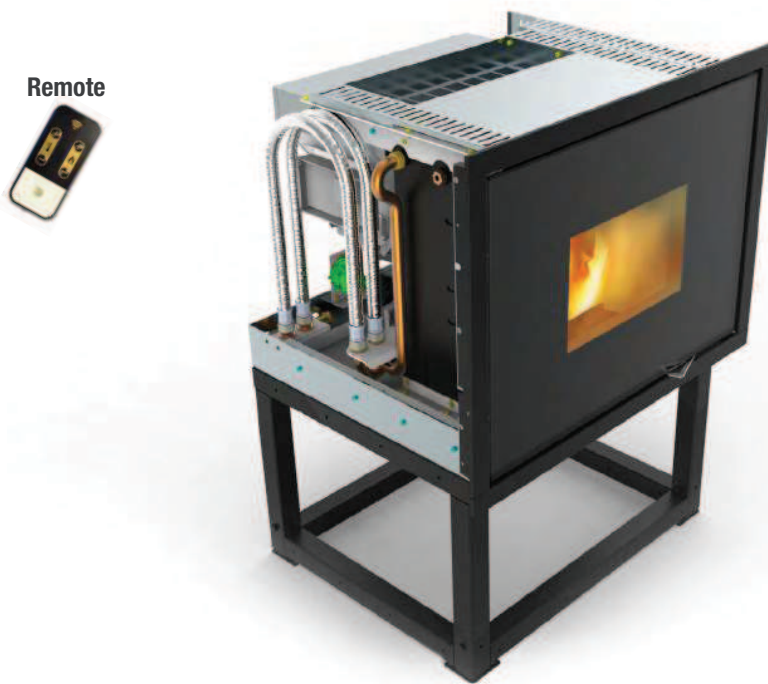

| TECHNICAL DATA | | Hydro insert 16 | Hydro insert 23 |
|---------------------------------|---------|-----------------|-----------------|
| Heat input (max - min) | kW | 16 - 4,8 | 23 - 4,8 |
| Nominal heat output (max - min) | kW | 14,5 - 4,5 | 20,8 - 4,5 |
| Water heat output (max - min) | kW | 11,5 - 2,4 | 17,3 - 2,4 |
| Space heat output (max - min) | kW | 3,0 - 2,1 | 3,5 - 2,1 |
| Pellet consumption (max - min) | kg - h | 3,2 - 1 | 4,7 - 1 |
| Efficiency (max - min) | % | 93 - 91 | 93 - 90,5 |
| Smoke outlet tube | ø mm | 80 | 80 |
| Tank capacity | lt - kg | 33 - 22 | 33 - 22 |
| Autonomy (max - min) | h | 7 - 22 | 14,5 - 22 |
| Nominal power input | W | 110 - 320 | 140 - 320 |
| Dimensions (W x D x H) | mm | 740x650x670 | 840x650x670 |
| Net weight | kg | 180 | 185 |

The above data are not official and awaiting confirmation

15a B-VG

Certification for environment
respect and protection



German institution for development
Of eco-energies



Marking CE



EN-14785

European standard for
heating appliances



TÜV Rheinland[®]
Precisely Right

European certification for product quality